

DESCRIPTION

- Indoor or outdoor clocks available in various sizes. High brightness LED.
- LED colour available: red, white or yellow.
- Setting by control pad (2 keys inside the clock) or by wireless remote control 433,92 MHz.
- Optional synchronisation: Minute impulse, DCF or GPS antenna (absolute time accuracy).
- Optional time distribution: AFNOR, DHF, NTP or PC.
- Single-sided display.



GENERAL FEATURES

- Optimal viewing distance..... 200 metres with a viewing angle of 160°.
- Setting of luminosity..... Automatic (sun, cloud or night).
- Setting of alternation duration..... 2 to 6 seconds.
- Display of time..... date and temperature, counting / countdown, rate of chlorine, rate of humidity. Fix or alternate (manual input for the rate of chlorine and humidity).
- Time display..... 12 or 24 h mode.
- Time changeover..... Automatic summer/winter.
- Temperature display..... In Celsius (°C) or Fahrenheit (°F) from -99° to +99.9°.
- Display..... °C or °F in the menu. Display resolution: 0.1°C.
Accuracy: ±0.5°C from -10 to +85°C.
Offset adjustment, possible from - 9.9° to + 9.9°.
Display test menu.
- 869 MHZ HF temperature option..... 50 meters communication distance (through a wall).
Transmission of the data to the clock every 15 seconds.

MECHANICAL FEATURES

- Construction..... Black aluminium casing. IP 54, IK 07.
- Window..... Antiglare protection glass.
- Operating temperature..... -20°C to +50°C.
- Humidity..... 93% at 40°C.
- Electronic cards..... Tropicalized.
- Mounting..... Wall mounted or optional bracket.
- Weight..... 21 Kg.



Wireless remote control

ELECTRICAL FEATURES

- Power supply..... 115/230VAC 50/60HZ.
- Rated current..... 0.8A to 115VAC ; 0.4A to 230VAC.

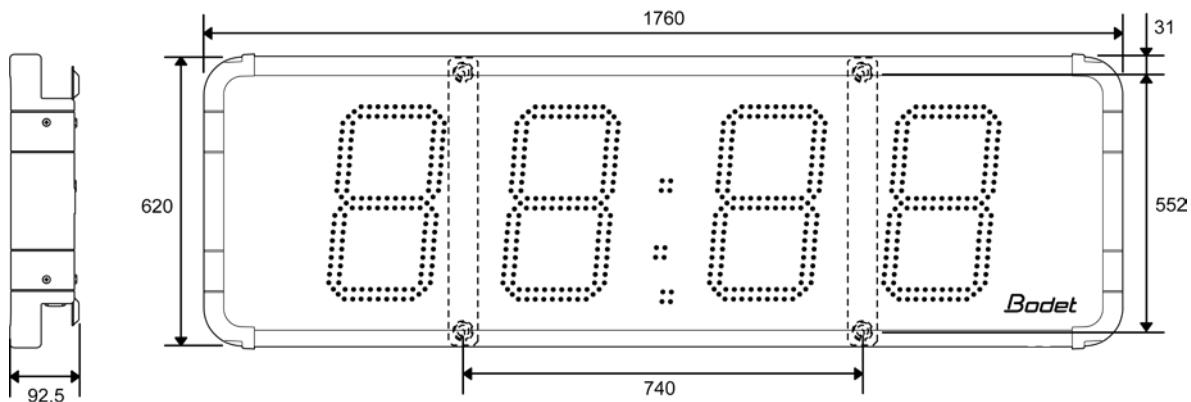
SYNCHRONISATION OPTIONS

- 939 051..... AFNOR/IMPULSE synchronisation card
- 939 052..... DHF receiver (with antenna) for HF temperature and DHF time
- 939 053..... PC /ASCII synchronisation card for data display
- 939 057..... NTP synchronisation card
- 939 055..... Relay control option card
- 939 056..... AFNOR synchronisation card

REFERENCES

- | | | | |
|------------------|-----------------------------------|----------------|--|
| • 939 361* | HMT LED 45 cm | • 939 041..... | Wireless Temperature Probe |
| • 935 011..... | Temperature probe (with 5m cable) | • 939 045..... | Wired Air Temperature / Humidity probe (5m cable) |
| • 939 040..... | Wireless remote control | • 915 296..... | Synchronisation cable kit (to synchronise 2 HMT that are not attached) |

* Add the letter corresponding to the colour: R = red, J = yellow, W = white.

WALL MOUNTING

Dimensions in mm