

DESCRIPTION

- SMD LED technology for indoor installation.
- Hours and minutes display.
- Fixed or alternate time with date or week number display.
- Height of digits 7 cm, optimal viewing distance: 30 metres.
- Angle of vision: 120°.
- LED colours: red, green, yellow, blue and white.
- Models: independent, impulse, wireless DCF, wireless DHF, AFNOR and NTP.



STANDARDS

- EMC: - EN55032.
- EN55024.
- LVD: EN60950.
- RED (radio models): EN301-489-3.

GENERAL FEATURES

- **Adjustable brightness**..... 4 levels.
- **Display mode**..... 12 or 24 hour.
- **Eco mode**..... Programmable energy saving or predefined over a time period.
- **Time change**..... Automatic summer/winter time changeover and perpetual calendar.
- **Time base backup**..... - Independent model: 15 days in case of power failure.
- Impulse model: in case of power failure, data saving and impulses reception without battery.
- Synchronised models: at each start the clocks wait for the synchronisation signal.
- **Time accuracy**..... 0.2 second/day (except NTP model: precision dependent on the time server).
- **Operation**..... Silent.
- **Digit**..... 7 segments with 4 LEDs each.
- **Hours and minutes separating**..... Colon made of LEDs.
- **Configuration**..... 2 capacitive buttons.
- **NTP model**..... - Synchronisation unicast, multicast and by DHCP.
- Advanced configuration from the embedded web server.

MECHANICAL FEATURES

- **Construction**..... PC/ABS black (IP30, IK02) and PPMA Poly(methyl methacrylate) cristal.
- **Operating temperature range**..... -5 to +55°C.
- **Weight**..... 0.53 Kg.
- **Dimensions**..... See on the back.

ELECTRICAL FEATURES

- **Power supply**..... - Independent, impulse, AFNOR and wireless DHF models: 100-240VAC.
- Wireless DCF model: 230VAC.
- NTP model: PoE (Power over Ethernet) – class 0.
- **Consumption**..... 100-240 VAC ; 60-25mA.
- **Electric protection**..... NTP model: Class 3.
Other Synchronisations: Class 2.

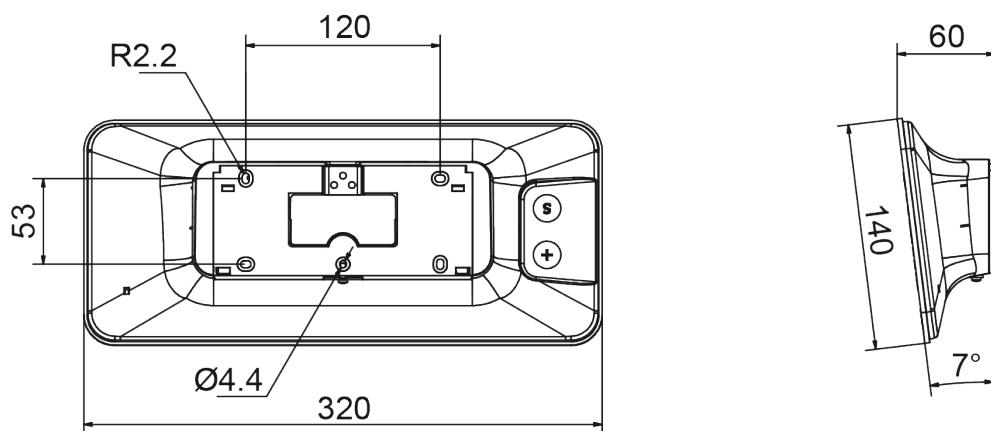
STYLE 7 REFERENCES (BY SYNCHRONISATION)

- | | | | |
|----------------|-------------------|----------------|-----------------------------|
| • 946 41x..... | Independent model | • 946 001..... | Mounting on hanging bracket |
| • 946 42x..... | Impulse model | • 946 002..... | Wall mounting |
| • 946 43x..... | DCF model | | |
| • 946 44x..... | DHF model | | |
| • 946 45x..... | AFNOR model | | |
| • 946 47x..... | NTP model | | |
- Specify the LED colour by replacing the "x" in the reference number by: 1: red - 2: green - 3: yellow - 4: blue - 5: white



WALL MOUNTING

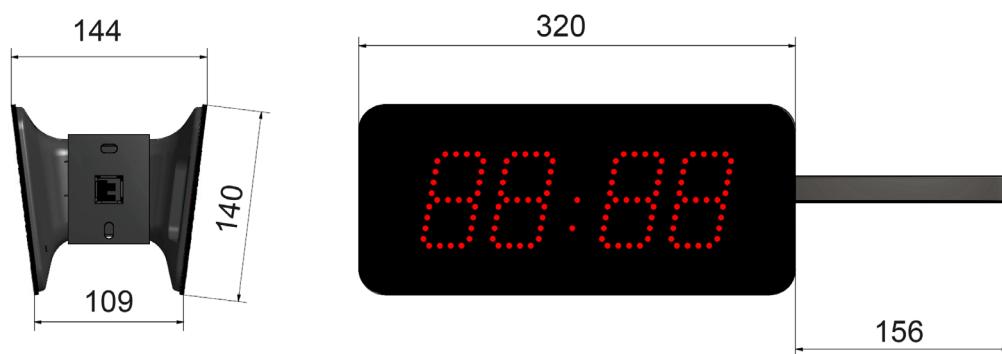
Dimensions in mm



MOUNTING ON HANGING BRACKET

- The hanging bracket makes possible to hang the clock from the ceiling or from the wall.
- Construction: Steel.
- Colour: Black.

Dimensions in mm



DESCRIPTION

- Style 7 recess mounting digital clock having the same electronics and the same operation than the normal version. However the mechanics are different to allow for recess mounting in a wall.
- LED colour: red.
- Models: independent, impulse, AFNOR and NTP.

RECESSED VERSION**GENERAL FEATURES**

- Same as Style 7 normal version (see page 1)

MECHANICAL FEATURES

- **Construction**..... Black steel (IP30, IK02) and PPMA Poly (methyl methacrylate) cristal.
- **Operating temperature range**..... 0 to +50°C.
- **Weight**..... 0.765 kg (NTP: 0.750 kg).
- **Dimensions**..... See next page.

ELECTRICAL FEATURES

- Same as Style 7 normal version (see page 1)

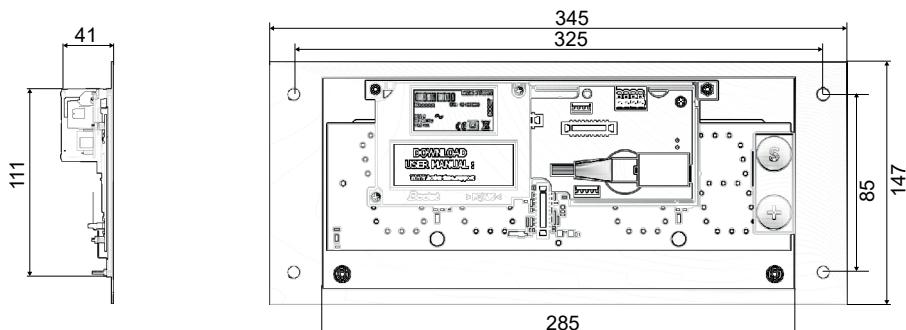
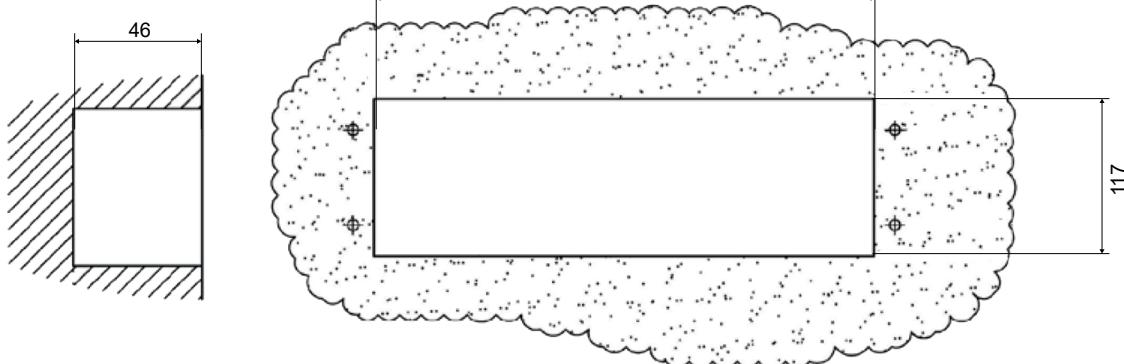
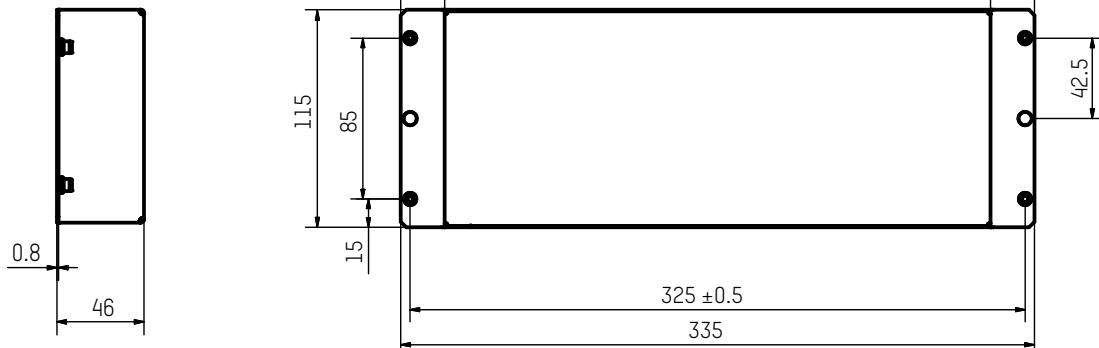
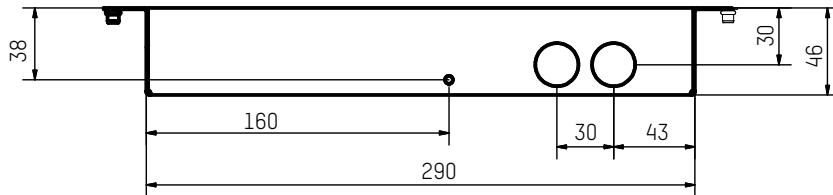
REFERENCES STYLE RECESSED 7 (BY SYNCHRONISATION)

- 946 411 F..... Independent model
- 946 421 F..... Impulse model
- 946 441 F..... DHF model*
- 946 451 F..... AFNOR model
- 946 471 F..... NTP model
- 946 014..... Back cover for recess mounting

* Recess mounting is possible but not in metallic partition or equivalent which would perturb the reception of radio signal.

DIMENSIONS

Dimensions in mm

Clock**Size****Recess mounting**

DESCRIPTION

- Style 7 waterproof digital clock having the same electronics and the same operation than the normal version. However the mechanics are different to allow for an IP55 Ingress protection rating.
- LED colour: red.
- Models: independent, impulse, DHF, AFNOR and NTP.

WATERPROOF VERSION**GENERAL FEATURES**

- Same as Style 7 normal version (see page 1).

MECHANICAL FEATURES

- Same as Style 7 normal version (see page 1).
- In order to guarantee an IP55 Ingress Protection, the grommets are waterproof and silicon seals are installed between the bracket and the clock casing.

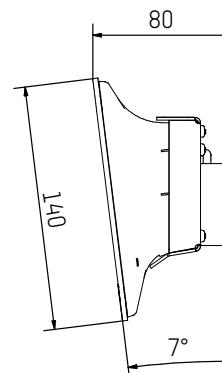
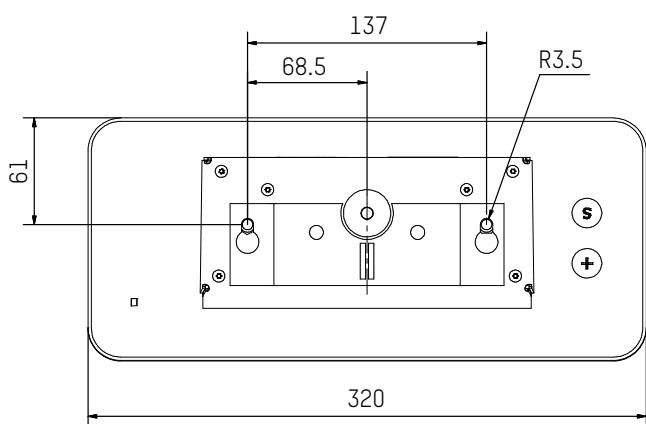
ELECTRICAL FEATURES

- Same as Style 7 normal version (see page 1).

DIMENSIONS

- Dimensions for wall mounting:

Dimensions in mm

**REFERENCES STYLE 7 WATERPROOF (BY SYNCHRONISATION)**

- 946 411 A..... Independent model
- 946 421 A..... Impulse model
- 946 441 A..... DHF model
- 946 451 A..... AFNOR model
- 946 471 A..... NTP model